

**PRODUCT FEATURES**

Handle :	20 Gauge Deep Drawn, Stainless Steel Recessed Cup
Hinge :	16 Gauge Continuous, Welded To Door & Riveted To Frame
Bottom :	16 Gauge

**PRODUCT INFORMATION**

Material :	Mild Cold Rolled Commercial Quality Steel
Finish :	Baked Pure TGIC Powder Coat
Construction :	Common Intermediate Uprights Separating Units
Door :	14 Gauge
Door Stiffener/Reinforcement :	16 Gauge
Door Frame :	16 Gauge
Door Ventilation :	4" Louvers, (6) @ Top and (6) @ Bottom Each Door
Door Latching :	Single-Point Latch Clips
Top :	24 Gauge
Side :	24 Gauge, Solid
Back :	24 Gauge
Shelf :	24 Gauge
Interior Equipment :	(3) SGL Prong Wall Hooks And (1) Coat Rod Per Opening
Number Plate :	Polished Aluminum Plate, Door Riveted
Assembly :	Rivet


**ACCESSORY INFORMATION**

Slope Hood :	18 Gauge Continuous Slope Hood
Lock :	None Provided
Legs :	None Provided
Base :	4" Zee Base
Recessed Trim :	None Provided

Comments:  
Color : Please Advise Within Reasonable Variation

**JOB INFORMATION**

**Knockdown Plus  
Single Tier Locker  
12 x 18 x 72"**

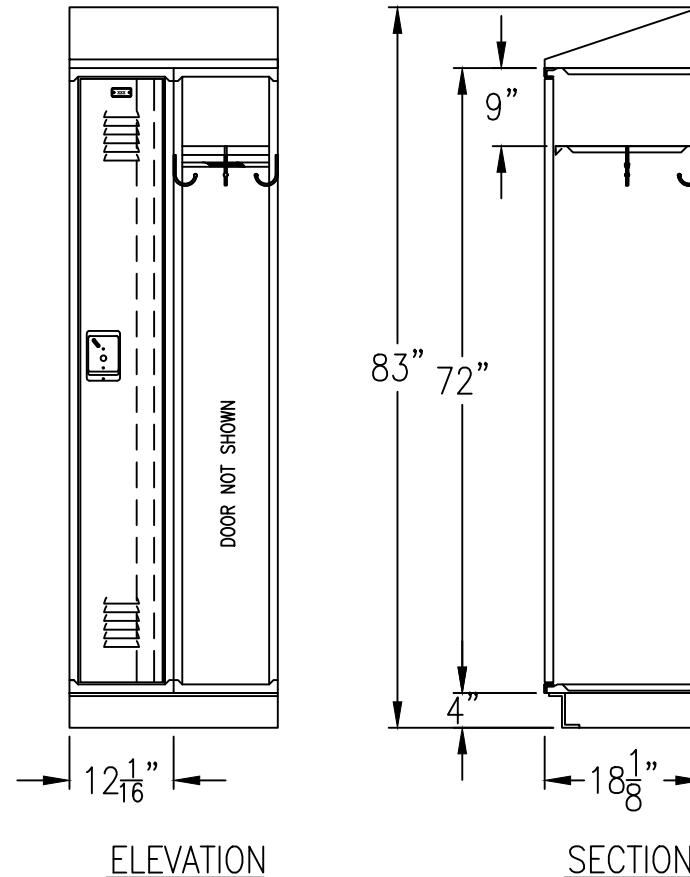

PLEASE BE ADVISED: Lockers Are Square And Measured Based On Square Walls. If Walls Are Not Square, Adjustments To Bases Will Need To Be Made At The Expense Of The Customer To Make Allowances For The Locker Sizes As Specified In The Shop Drawings.

Tolerances in Manufacturing Understood: Fractions  $\pm \frac{1}{16}$ , Decimals  $\pm .02$ , Degrees  $\pm 20^\circ$

NOTICE: All Rights Reserved, ©2024. These Drawings Of Products Described Are Subject To All Patents And Copyrights Held By Lockers Manufacturing.



PLEASE BE ADVISED:  
Shop Drawings Are To Ensure We Understand Your Request. Your Approval Of These Shop Drawings Overrides Any Other Specifications Or Documentation. Please Check And Approve As We Are Going To Manufacture Material As Shown On These Drawings.