

**PRODUCT FEATURES**

Handle : Cremona Style Turn Handle  
 Hinge : 16 Gauge Continuous, Welded To Door & Riveted To Frame  
 Bottom : 16 Gauge

**PRODUCT INFORMATION**

Material : Mild Cold Rolled Commercial Quality Steel  
 Finish : Baked Pure TGIC Powder Coat  
 Construction : Welded One-Piece Structure  
 Door : 14 Gauge  
 Door Stiffener/Reinforcement : 16 Gauge  
 Door Frame : 1-1/4" x 1-1/4" 13 Gauge Angle Frame  
 Door Ventilation : 3/4" x 1-1/2" Diamond Perforations Each Door  
 Door Latching : Three-Point Latching  
 Top : 16 Gauge  
 Side : 16 Gauge, Diamond Perforated / Solid Sides @ Corners & Walls  
 Back : 18 Gauge  
 Shelf : 16 Gauge, (3) Evenly Spaced  
 Interior Equipment : (1) Coat Rod Per Opening  
 Number Plate : Polished Aluminum Plate  
 Assembly : All-Welded


**ACCESSORY INFORMATION**

Slope Top or Hood : None Provided  
 Lock : None Provided  
 Legs : None Provided  
 Base : None Provided  
 Recess Trim : None Provided

Comments:  
 Color : Please Advise Within Reasonable Variation

**JOB INFORMATION**

**All-Welded Series  
 TA-50  
 48 x 24 x 78"**

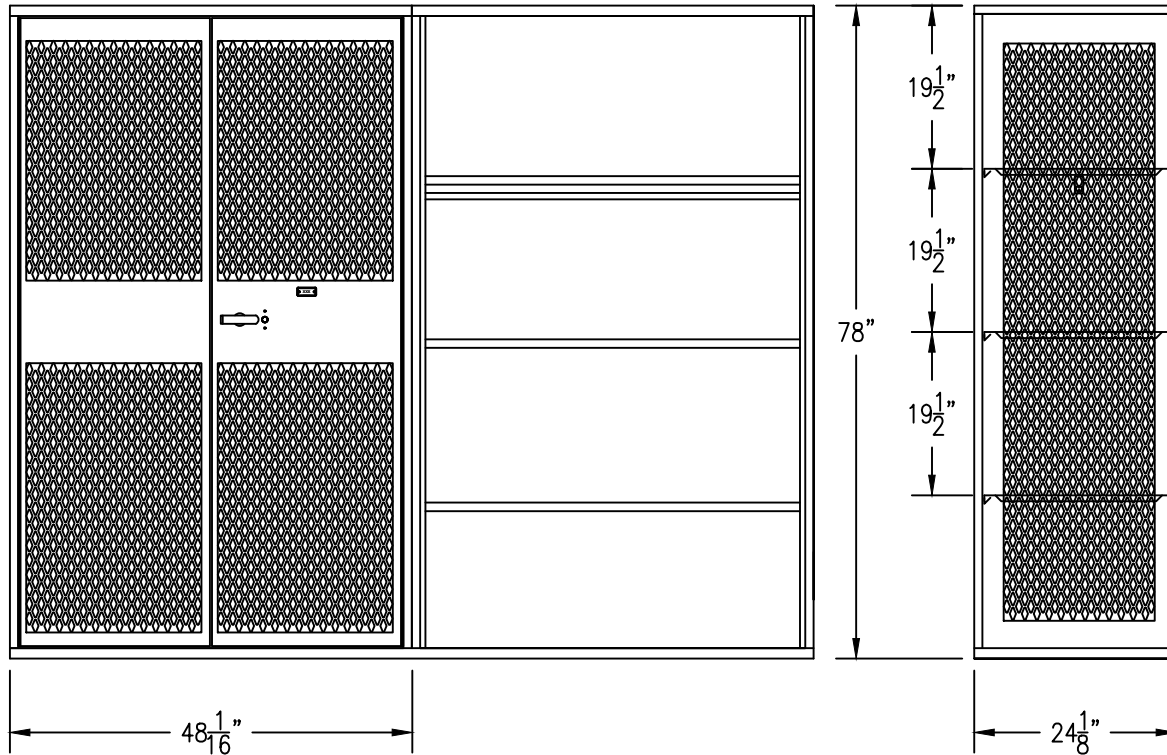

ELEVATION

SECTION

PLEASE BE ADVISED: Lockers Are Square And Measured Based On Square Walls. If Walls Are Not Square, Adjustments To Bases Will Need To Be Made At The Expense Of The Customer To Make Allowances For The Locker Sizes As Specified In The Shop Drawings.

Tolerances in Manufacturing Understood: Fractions  $\pm \frac{1}{16}$ ", Decimals  $\pm .02$ , Degrees  $\pm 20^\circ$

NOTICE: All Rights Reserved, ©2024. These Drawings Of Products Described Are Subject To All Patents And Copyrights Held By Lockers Manufacturing.

PLEASE BE ADVISED:  
 Shop Drawings Are To Ensure We Understand Your Request. Your Approval Of These Shop Drawings Overrides Any Other Specifications Or Documentation. Please Check And Approve As We Are Going To Manufacture Material As Shown On These Drawings.

